



**POLYKEN® 236**  
Premium Grade Printed Duct Tape


**APPLICATIONS**

- Seal metal duct work.
- Seal fiberglass insulation.
- Cover thermal insulations.
- Home & general repair.

**FEATURES & BENEFITS**

- Aggressive adhesive.
- Excellent handling characteristics.
- Conforms well to irregular surfaces.
- Will not twist or curl during application.
- Tested in accordance with UL 723.
- Printed "Polyken 236, Max. Temp 200°F" with 4.5" repeat.

**CONSTRUCTION**

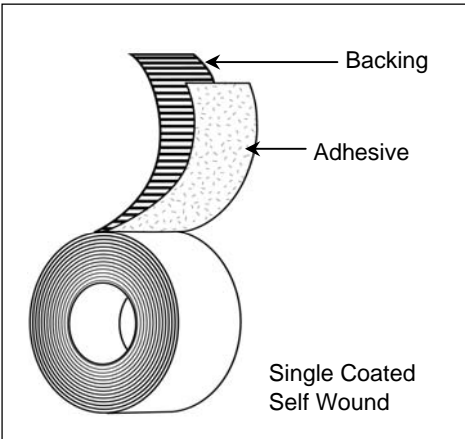

**PRODUCT DESCRIPTION**

**Single-Coated Construction**

**Backing:**

- Printed Polyethylene Coated Cloth

**Adhesive:**

- Rubber

**Colors:**

- Black, Silver

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	304.80 μ	ASTM D 1000
Adhesion to Steel	36 oz./in.	3.94 N/cm	PSTC-1
Adhesion to Backing	28 oz./in.	3.06 N/cm	PSTC-1
Tensile Strength	28 lb./in.	49.04 N/cm	ASTM D 1000
Maximum Performance Temperature	200 D F		
Flame Spread	5		
Smoke Developed	5		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at COVALENCE ADHESIVES, LLC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Covalence's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which COVALENCE ADHESIVES assumes any legal responsibility.