

6" Metal Cleat for DM25/35

Ductmate 6" Metal Cleat

Job: _____


Location: _____

Submitted to: _____

Prepared by: _____

Approved by: _____

Date: _____

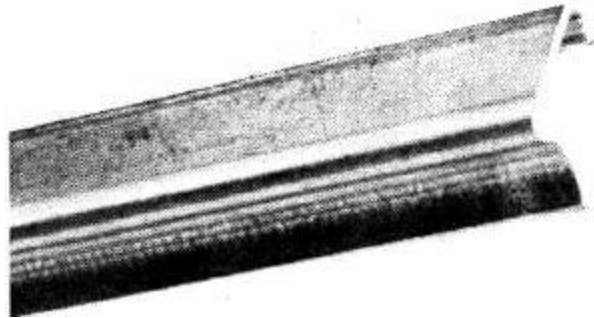

MANUFACTURED BY



1502 Industrial Drive
Monongahela, PA 15063
800-245-3188
www.ductmate.com

INDUSTRY REGULATIONS



ORDERING INFORMATION

Please contact your local Ductmate Distributor.

PRODUCT GUARANTEE

Ductmate metal cleat are guaranteed against defective material.

DESCRIPTION

Precision roll formed 6" galvanized metal cleat for the Ductmate 25/35 connection systems.

BASIC USE

DM25/35 cleat is applied around perimeter of transverse joint.

FEATURES

- Insures even compression of the gasket along the length of the flange.
- Can be snapped on or driven on.
- Rollformed from 20 gauge galvanized steel.
- Available in galvanized, galvanneal, 304 stainless steel, 316 stainless steel, aluminized and PVC-coated steel.
- Cleat spacing when using 440 butyl gasket: for all low, medium, and high pressure applications, use 6" metal cleat 24" O.C.