



Collared "Rip Stop" Silver Jacket



Collared Duct for a smooth transition to your sheet metal fittings

Our 5', 6' and 7' collared Silver Jacket Flex Duct has a metallic, polyester-vapor barrier with special rip-stop scrim reinforcement. It is constructed with universal male / female collars that are factory attached at each end. Standard diameters are available in 4" to 20" for R-value 4.2, 6.0 and 8.0. These are packaged 2 pieces per box.


www.quietflex.com

Key Features & Benefits

- Universal male and female collar included in box
- Johns Manville Formaldehyde-free™ fiber glass insulation
- GREENGUARD® certified insulation
- Available in 5', 6' and 7'
- HUD/FHA standards 515.2.1, paragraph B
- NFPA standards 90A and 90B
- Meets BOCA, City of Chicago, federal, state and local codes and standards
- UL listed/approved to UL 181

Other products we offer:

- Air Handling - Duct Board
- Air Handling - Duct Wrap

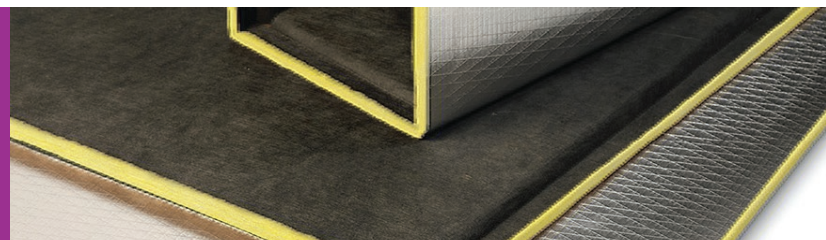



FLEX DUCT PRODUCT:

RIP STOP SILVER JACKET WITH COLLARS BOTH ENDS

Configurations

- Diameters available: 4"-10", 12", 14", 16", 18", 20"
- Lengths available: 5, 6 & 7 ft.

Approvals

- ETL Listed/Approved to UL 181 Standard
- NFPA standards 90A and 90B
- HUD/FHA standards 515.2.1 Paragraph B
- Meets most federal, state and local codes and standards
- GREENGUARD certified entire duct construction

Fiberglass

- R4.2, R6.0 and R8.0 certified by ETL and the Air Diffusion Council using ASTM C-518 at installed thickness of insulation
- Made of formaldehyde free materials

Surface burning characteristics


- Flame spread: Less than 25
- Smoke developed: Less than 50
- Class 1 rated duct assembly

Operating temperature range

- -20°F to 180°F - Continuous
- -20°F to 200°F - Intermittent

Vapor barrier

- The Quietflex Rip Stop Silver Jacket has a metalized polyester-vapor barrier with a special "rip stop" scrim reinforcement.
- Vapor Transmission: 0.05 perms

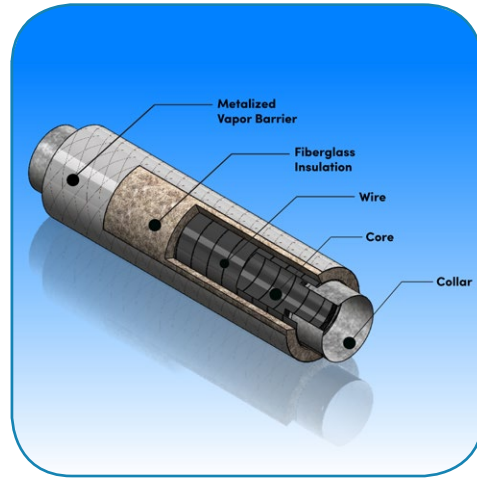

Core

- Two layers of polyester film encapsulate a galvanized or bronze coated wire helix
- Rated positive pressure is 10" W.C. and negative pressure is 1/2" W.C. per the UL 181 standard - Rated maximum air velocity is 6000 FPM

Collar Specifications

- 26 ga galvanized steel
- 0.30 oz/sq ft zinc coating
- G60-ASTM
- Collar assembly meets ADC standards

Job Name		Submitter:		Date:	
Location					Class 1 Insulated Flexible Air Duct Metalized Polyester vapor barrier/ Silver jacket w/collars on ends QFSD-003-01
Contractor					
Engineer					
Architect					

4518 Brittmoore Road • Houston, Texas 77041 • Phone 713.849.2163 • quietflex.com

Limited Warranty | Limitation of Liability | Disclaimer of Unstated Warranties

The flexible air duct is warranted by Quietflex Manufacturing Company, L.P., for ten (10) years against defects in material and workmanship. This warranty is for exchange of duct only and does not include installation.

Warranty Exclusions

Warranty is excluded if flexible air duct is used in the following installations / applications:
 1. Where duct is exposed to direct or indirect light.
 2. Where duct is used on the high – pressure side of variable air – volume (VAV) systems.

Limitation of Liability

Quietflex's liability for damages, whether in contract, in tort, under warranty, in negligence or otherwise, shall not exceed the return of the amount of the purchase price paid for the Quietflex products. Quietflex shall not be liable for special, indirect or consequential damages. Specification and performance data listed herein are subject to change without notice.

Disclaimer of Unstated Warranties

This warranty is the only warranty of Quietflex products. All other warranties, expressed or implied, including, but not limited to, warranties of merchantability and fitness for a particular purpose are expressly disclaimed. Quietflex is a registered trademark of Quietflex Manufacturing Company, L.P.