




P MANUFACTURING & SUPPLY OF HVAC PRODUCTS
PACIFIC DUCT INC.



HVAC DUCT
MANUFACTURING & SUPPLY
CATALOG

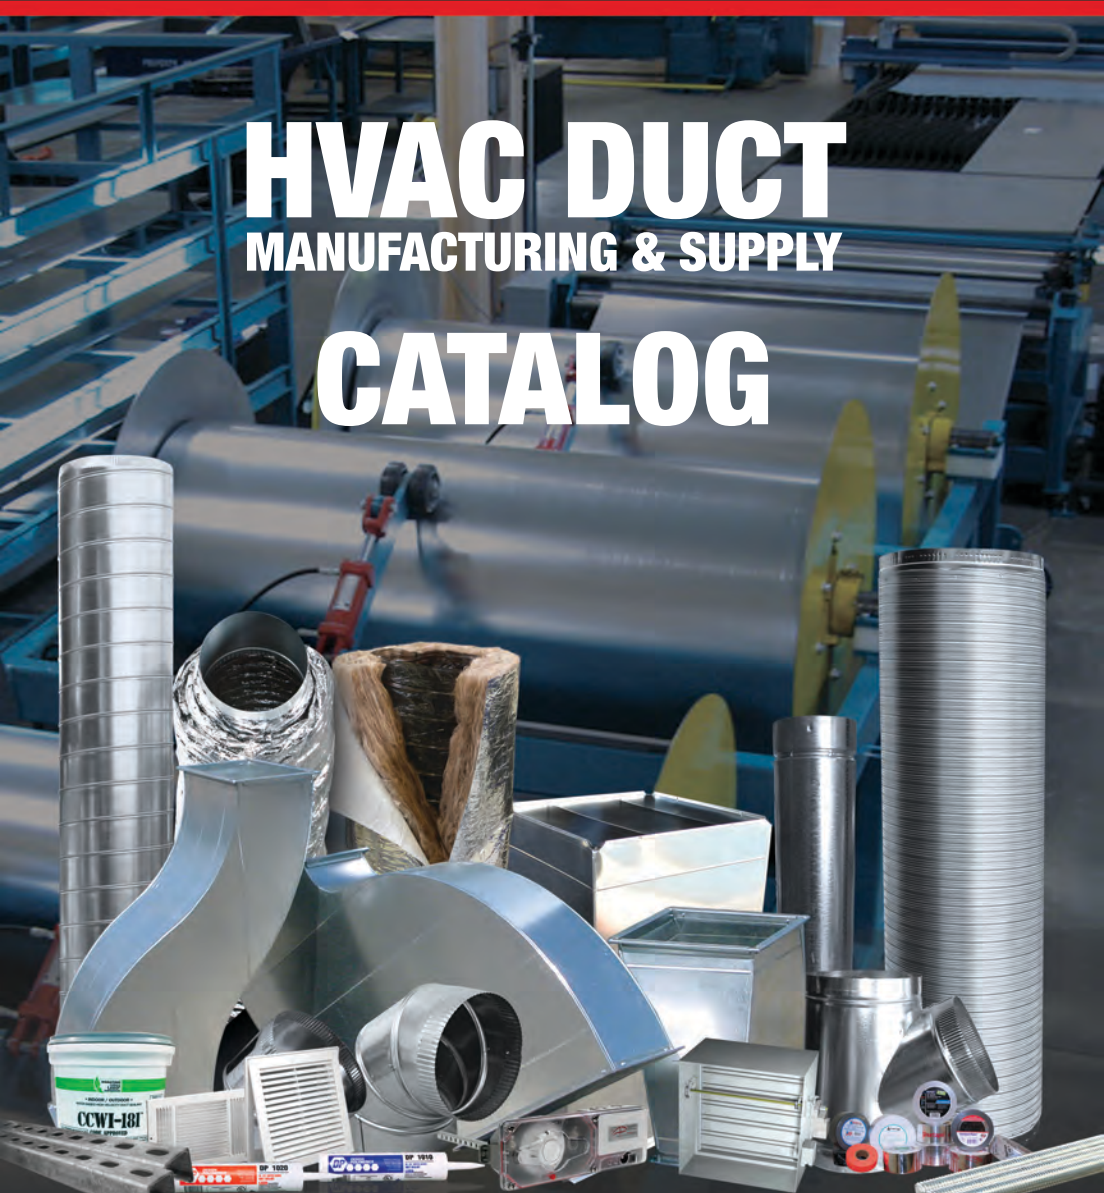

5499 W. BROOKS STREET MONTCLAIR, CA 91763
TEL (909) 635-1335 FAX (909) 635-1339



INTRODUCTORY

Committed to Excellence

At Pacific Duct we understand what you are looking for...

The highest quality H.V.A.C. products at the lowest price.

We are able to provide this to you by utilizing the latest in computerized fabrication equipment, thus assuring greater accuracy and lower pricing. Our competent, courteous sales staff is ready to give you same day quotations on your next project. We specialize in hard to find and difficult to make items. Light to heavy gauges fabricated to your order. Let our staff assist you with hard to fit and custom design items.



**If you did not see the
item you're looking for
call us at
(909) 635-1335**

We Manufacture & Supply:

- **Round & Rectangular Sheet Metal & Ducts**
- **Grease Duct** (Galvanized, Cold Rolled Steel, Hot Rolled Steel, & Stainless Steel)
- **Stainless Steel**
- **Aluminum**
- **Perforated & Expanded Metal**
- **Double Wall Duct** (rectangular & round)
- **Supplies & Accessories**

We can custom fabricate just about any fitting.

Keep updated with our monthly specials
@ **www.PacificDuct.com**
or contact us at **sales@pacificduct.com**



TABLE OF CONTENTS

PRODUCT LINE	PAGE
ROUND DUCT, FITTINGS & APDAPTERS	4-8
Spiral Pipe	9
Snap Lock Pipe (K.D) & Conductor Pipe	10
Flexible Duct (Flex Duct & Aluminum Flex)	11
Elbows	12
T-wyes, Dual T-wyes & Tees	13
Tapers/Reducers, Cookie Cutters	14
Dampers and Sleeves	15
End Caps, Start Collars and Spin-Ins	16
Round Duct Connectors	17
Saddles (Flat, Radius & Rectangular)	18
Ceiling Boxes, Side Feed, & Floor Boxes	19
Boots Standard & Perimeter (Straight, Stackhead, & Cone)	20
China Caps, Dryer Vents & Eyebrows	21
B-Vent, Conductor Flashing & T-Top Vents	22
RECTANGULAR DUCT	23
Rectangular Duct Connectors & Accessories	24
Return Air Cans, Drain Pans & Line Set Covers	25
"S" Lock & Drives, Standing "S", Angle, Vanes & Rails	26
Riser Pipe, Riser Elbows & Register Boxes	27
Access Doors (Duct, Drywall & Fire Doors)	28
Hanger and Supports (Strap, Struts, Threaded Rod, & Iso Hangers)	29
Damper Hardware, Screws, Bolts, Nuts & Rivets	30
Insulation Liner & Fire Wrap, Duct Cover Film, & Flex Connector	31
Rod Anchors, End & Cross Drilled (Wood, Concrete, & Steel)	32
Hanger Hardware (Beam Clamp, Angles, Strap & Spring Nuts)	33
Tapes, (Duct & Foil), Duct Sealer, Adhesives, & Fire Stop	34
Copper Fittings, Copper Line Set, PVC Pipe & Fittings	35
Gases, Brazing Alloy, Black Iron Pipe & Fittings, Gas Line Connectors	36
Thermostat Wires, Whips, Pigtails/Power Cord, Disconnect & Fuses	37
Coil Cleaner, Freon & Zip Ties	38
Stamped Grilles and Registers (Supply & Return)	39
Bar Type Grilles and Registers (Supply & Return)	40
T-Bar Diffusers, Supply & Return (Curve Blade & Cone)	41
Louvers	42
Dampers (Fire & Smoke, Backdraft & Control)	43
Smoke Detectors and Gas Detection System	44
Submittal Sheet Rectangular Duct & Fittings	45
Submittal Sheet Round Duct & Fittings	46



MANUFACTURING & SUPPLY OF HVAC PRODUCTS

PACIFIC DUCT INC.

DUCT, FITTINGS, & ACCESSORIES































				
SPIRAL PIPE	CONDUCTOR PIPE	SNAP LOCK PIPE	FLEX DUCT	ALUMINUM FLEX
				
T-WYE	DUAL T-WYE	DUAL TEE	TRUE TEE	AIRFLOW TEE
				
PANT WYE	SPLITTER WYE	90° ADJ. ELBOW	45° ADJ. ELBOW	90° SPOT WELDED ELBOW
				
45° SPOT WELDED ELBOW	90° STAMPED ELBOW	45° STAMPED ELBOW	90° FLAT SADDLE	45° FLAT SADDLE
				
90° RADIUS SADDLE	45° RADIUS SADDLE	COLLARS	CONDUCTOR FLASHING	T-TOP VENT
				
SPIRAL COUPLING	END CAP	COOKIE CUTTER	TAPER	TAPER W/COLLARS



MANUFACTURING & SUPPLY OF HVAC PRODUCTS

PACIFIC DUCT INC.

DUCT, FITTINGS, & ACCESSORIES

				
CHINA CAP	DOUBLE WALL B-VENT	EYEBROW VENT	CEILING BOX (TOP FEED)	CEILING BOX (SIDE FEED)
				
FLOOR BOX	DRAIN PAN	FAU STAND	RETURN AIR CANS	DRYER VENT
				
STANDARD STRAIGHT BOOT	STANDARD STACKHEAD BOOT	STANDARD CONE BOOT	PERIMETER STRAIGHT BOOT	PERIMETER STACKHEAD BOOT
				
PERIMETER CONE BOOT	RISER PIPE	STANDARD 90° & 45° RISER ELBOW	FLAT 90° & 45° RISER ELBOW	REGISTER BOX
				
LINE SET COVER	SQUARE TO ROUND	STRAIGHT SPIN-INS	CONICAL SPIN-INS	SLEEVE W/DAMPER
				
PLENUM END CAP	RECTANGULAR PLENUM W/CAP	DUCT W/CONNECTOR	90° ELBOW	NON 90° ELBOW



DUCT, FITTINGS, & ACCESSORIES

				
L-SECTION DUCT	RECTANGULAR TEE	TRANSITION	TRANSITIONAL OFFSET	STRAIGHT OFFSET
				
PANT FITTING	CROSS TEE	GOOSE NECK	RECTANGULAR SADDLE	PARKER FITTING
				
ROOF CURB	FLEX CONNECTOR	ANGLES	ANGLE RINGS	ECONO FLANGE
				
"S" LOCK	STANDING 'S'	FLAT DRIVES	FLANGE	GASKETS
				
TDC/J-CORNERS CORNERS/CLEATS	CLEAT/TOOL	VANES/RAILS	ROUND DOOR	FIRE DOORS
				
ACCESS DOOR	INSULATION WRAP	FIRE WRAP	WELD PINS	STICK PINS



DUCT, FITTINGS, & ACCESSORIES

<p>DIAL SQUARE BEARING SPRING LOC WEDGE LOC ROUND BEARING QUADRANT JIFFY DAMPER</p>	<p>JIFFY DAMPER & HARDWARE</p>	<p>DAMPER HARDWARE</p>	<p>BOLTS/NUTS WASHERS</p>	<p>TEK/ZIP SCREWS</p>
<p>CONDUIT LOCK</p>	<p>RIVETS/GUN</p>	<p>SCREWS/NUT DRIVERS</p>	<p>SHEET METAL TOOLS</p>	<p>GLOVES</p>
<p>REGISTERS</p>	<p>GRILLES</p>	<p>DIFFUSERS</p>	<p>FILTERS</p>	<p>RUBBER PADS (ISO PADS)</p>
<p>THERMOSTATS WIRE</p>	<p>COPPER LINE SETS</p>	<p>SMOKE DETECTOR</p>	<p>GAS DETECTION SYSTEM</p>	<p>FIRE/SMOKE DAMPERS</p>
<p>WHIPS</p>	<p>PIGTAILS/ GROMMETS</p>	<p>FREON</p>	<p>SERVICES GASES</p>	<p>COIL CLEANERS</p>
<p>GAS LINES</p>	<p>BLACK IRON PIPE & FITTINGS</p>	<p>COPPER FITTINGS</p>	<p>BLAZING ALLOY</p>	<p>PVC PIPE & FITTINGS</p>

DUCT, FITTINGS, & ACCESSORIES

 LOUVERS	 HANGER STRAP	 STRAP BRACKET	 HANGER HARDWARE	 THREADED ROD ANCHORS
 AIRCRAFT CABLE	 CLUTCHER	 THREADED ROD	 UNISTRUT	 HANGER SUPPORT
 DURA-BLOK	 BAILING WIRE	 BRUSHES	 DUCT SEALER/ADHESIVE	 FIRE STOP/CAULKING
 DUCT COVER FILM	 DUCT/FOIL TAPE	 SPRAY PAINT	 ZIP TIES	 PLASMA LABELS
 DISCONNET AND FUSES	 THERMOSTATS	 EYE LAG SCREWS	 EYE LAG EXTENSION POLE	 SPRING HANGERS & MOUNTS

**Other Products available inside the catalog.
 Need help with Submittals?
 Go to our website: www.pacificduct.com**

SPIRAL PIPE


Size	Ga.
4"-22"	26
24"-30"	24
32"-36"	22
38"-50"	20
52"-60"	18

- Standard: 10' length galvanized steel
- Lined or wrapped spiral available upon request
- Stainless Steel, Aluminum, Perforated, & PVC Coated Spiral Pipe available upon request
- Other sizes, gauges, & material available



BARE

**Spiral Pipe also available
 Lined, Wrapped, PVC, Stainless Steel
 Paintlock, Aluminum & Perforated**




LINED/INSULATED



WRAPPED



PVC



PERFORATED

SNAP LOCK PIPE

K.D. PIPE

Size
3" - 20"
<ul style="list-style-type: none"> • Standard: 3' length, 5' lengths available upon request • Lined KD pipe available upon request • Other sizes, gauges, & material available upon request



BARE/LINED

CONDUCTOR PIPE

Size
3" - 5"
<ul style="list-style-type: none"> • Standard: 10' length • Other sizes, gauges, & material available upon request



FLEXIBLE DUCT

SOFT FLEX

Size	
25'L Box	5'L pieces with M/F Collars
4" - 20"	4" - 20"
<ul style="list-style-type: none"> • Available in metallized jacket, R4.2, R6 and R8 • 25'L made with raw ends • 5'L made with male/female collar ends • Other sizes & material available upon request 	



ALUMINUM FLEX

Size	
6'L Uncompressed with M/F Collars	10'L Compressed No Collars
5" - 20"	3" & 4"
<ul style="list-style-type: none"> • Available in bare or wrapped w/ metallized jacket • 3" & 4" made compressed with crimped end • Available in wrapped R4.2, R6 and R8 • Other sizes & material available upon request 	



WRAPPED



BARE

ADJUSTABLE ELBOWS

Size

3" - 30"

- Standard: Four Gores raw and crimp each end 90 degrees Adjustable Elbow
- Standard: Two Gores raw and crimp each end 45 degrees Adjustable Elbow
- Lined Elbow available upon request
- Other sizes, gauges, & material available upon request



90 DEG BARE



90 or 45 DEG LINED



45 DEG BARE

STAMPED & SPOT WELDED ELBOWS

Available Upon Request



90° STAMPED ELBOW



45° STAMPED ELBOW



90° SPOT WELDED ELBOW



45° SPOT WELDED ELBOW

- Stamped Elbow available in 3" - 12" upon request, in short or long radius, in 22 & 24 Ga
- Other sizes, gauges, & material available upon request

T-WYES

Size		
8 x 6 x 6	12 x 10 x 10	16 x 14 x 10
8 x 8 x 6	12 x 12 x 8	16 x 14 x 12
9 x 7 x 7	14 x 10 x 10	16 x 14 x 14
10 x 8 x 6	14 x 12 x 8	18 x 14 x 12
10 x 8 x 8	14 x 12 x 10	18 x 14 x 14
10 x 10 x 8	14 x 12 x 12	18 x 16 x 10
12 x 8 x 8	14 x 14 x 12	18 x 16 x 12
12 x 9 x 9	16 x 12 x 12	18 x 16 x 14
12 x 10 x 8	16 x 14 x 8	18 x 16 x 16

- Collars/Dampers installed on T-Wyes upon request
- Lined T-Wyes available upon request
- Reverse T-Wyes available upon request
- Other sizes, gauges, & materials available upon request



DUAL T-WYES & TEE

Available Upon Request		
 DUAL T-WYE	 DUAL TEE	 TRUE TEE
 PANT WYE	 SPLITTER WYE	 AIRFLOW TEE

TAPERS/REDUCERS

Size	
Short	Surefit
5" x 4"	10" x 8"
6" x 4"	12" x 8"
6" x 5"	12" x 10"
7" x 6"	14" x 10"
8" x 6"	14" x 12"
8" x 7"	16" x 12"
9" x 8"	16" x 14"
10" x 8"	18" x 14"
10" x 9"	18" x 16"
12" x 10"	20" x 16"
14" x 12"	20" x 18"
16" x 14"	22" x 18"
18" x 16"	24" x 20"
20" x 18"	

- Standard: Short Tapers 6" - 8" high, bare of beaded. Long tapers available upon request
- Collars & Dampers installed on tapers available upon request
- Lined Tapers available upon request
- Other sizes, gauges, & material available upon request



BARE



LINED



BARE

COOKIE CUTTERS

PANCAKE REDUCER

Size	
4 x 3	10 x 8
5 x 3	10 x 9
5 x 4	12 x 10
7 x 6	14 x 10
8 x 6	14 x 12
8 x 7	16 x 14
9 x 8	18 x 16

- Standard Overall Height: 4" Nominal
- Other sizes, gauges, & material available upon request



DAMPERS & SLEEVES

Jiffy Damper w/Hardware	Jiffy Damper In Sleeve
Size	Size
5 - 14"	5 - 14"
<ul style="list-style-type: none"> • *Includes 1 handle, 1 blade, 2 wing nuts, 2 bearings • Standard: Sleeve w/ Jiffy Damper • Made to SMACNA standards • Other sizes available upon request 	



JIFFY DAMPER



SLEEVE W/JIFFY DAMPER

3/8 DAMPERS WITH SLEEVE

- Standard size 6" - 22". Sleeve length 10" - 14". Crimped one end
- All galvanized steel. Made to SMACNA standards
- Standard hardware: 3/8 rod, bushings, 1.5" standoff regulator handle
- Disks made from 22 Ga min. Sleeves made to SMACNA standards
- Other sizes, gauges, and material are available upon request



SLEEVE W/ 3/8 ROD & STANDOFF

DAMPER HARDWARE



END CAPS

Size
4" - 22"
<ul style="list-style-type: none"> Standard: Oversized collar to fit over pipe Undersized End Caps (plugs) are available upon request Other sizes, gauges, & material available upon request



START COLLARS

Size
4" - 26"
<ul style="list-style-type: none"> Standard: 6" high, dove tail, crimped one end Available with or without damper Other sizes, gauges, & material available upon request



SPIN-INS

Size
4" - 18"
<ul style="list-style-type: none"> Standard: 6" high Conical Spin-Ins are available upon request Other sizes, gauges, & material available




STRAIGHT



SPIN-IN W/ SCOOP & DAMPER



CONICAL





ROUND DUCT CONNECTOR

SPIRAL COUPLING

- Standard: 4" - 26" Round, 4"L. Galv. Steel
- Male/Female Slip into pipes with center Bead
- Other sizes, gauges, & material available upon request



ANGLE RINGS

- Standard: 3" - 72" Round Steel, unpainted W/holes, Flange out
- Pressed and Rolled to join duct together
- Available in Galvanized and Stainless Steel upon request



DURA FLANGE

- Standard: 8" - 72" Round Galvanized Steel
- See website for specs
- Available in other specialty material




ROUND FLEX CONNECTOR

- Standard: Vinyl and Galvanized Steel
- Size: 3x3x3 or 4x4x4
- Gauge: 24Ga.
- Available in other specialty material



CONNECTOR ACCESSORIES



- For 1" Strap up to 18Ga



- 3/8" or 1/2" x 10'L



- For 3/8" Rod reduces noise



- Bolts and nuts 3/8" or 1/2"


SADDLES

Size	
45°	90°
6" - 18"	6" - 14"

- All branches on saddles are crimped
- Specify size and orientation of saddle (45° or 90°)
- Specify pipe size for radius saddles
- Other sizes, gauges, & material available upon request



RADIUS SADDLE

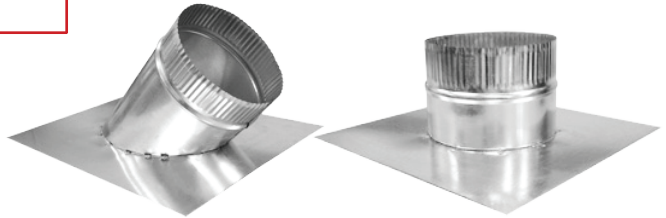

FLAT SADDLE


RECTANGULAR SADDLES

- Standard: 1" Flange
- Specify inside dimension top flange
- Standard: 4" height
- Specify pipe size for bottom flange
- Made to SMACNA standards
- Sizes, gauges, and material available upon request



CEILING BOXES

Size
6" - 24"
<ul style="list-style-type: none"> • Standard Collar Height: 2 1/4" with Plaster Ground • Available in Raw or Flanged upon request • Side Inlet feed Ceiling Box available upon request • 6" & 8" High Ceiling box available upon request • Other sizes, gauges, & material available upon request



FLOOR BOXES

Size	
8 x 4 x 5	14 x 6 x 7
10 x 4 x 5	14 x 6 x 8
10 x 6 x 6	14 x 8 x 8
12 x 6 x 7	14 x 8 x 9
<ul style="list-style-type: none"> • Standard: 30 Gauge • Available with ears & Damper upon request • Other sizes, gauges, & material available upon request 	



STANDARD RISER BOOTS

Size	
8" x 4"	12" x 7"
8" x 5"	14" x 8"
10" x 5"	14" x 9"
10" x 6"	

- Standard: 30 Gauge, 3-1/4" wide
- Available in Straight, Stackhead, or Cone
- Other sizes, gauges, & material available upon request



**STANDARD
STACKHEAD
BOOT**



**STANDARD
STRAIGHT
BOOT**



**STANDARD
CONE BOOT**

PERIMETER BOOTS

Size	
8" x 4" x 5"	12" x 6" x 7"
10" x 4" x 5"	14" x 6" x 8"
10" x 6" x 6"	14" x 8" x 9"

- Available in Straight, Stackhead, or Cone
- Other sizes, gauges, & material available upon request



**PERIMETER
STACKHEAD
BOOT**



**PERIMETER
STRAIGHT BOOT**



**PERIMETER
CONE BOOT**

CHINA CAP

Size
8" - 14"
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request




DRYER VENT

Size
3" - 7"
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request



EYEBROW VENT

Size
4" - 14"
<ul style="list-style-type: none"> • Available with damper upon request • Other sizes, gauges, & material available upon request




DOUBLE WALL B-VENT PIPE & FITTINGS

Fittings	
Pipe	Reducer
Elbow	Storm Collar
Draft Hood	Tees
Cap	Universal Adapter
Firestop	Wall Thimble
Flex Wall	Wall Support
Increaser	Wye
Adj. Pipe	Collar



CONDUCTOR FLASHINGS

Size
1" - 10"
<ul style="list-style-type: none"> • Available in Galvanized, Galv. Mesh, Dead Soft Alum., and Shake Base • Other sizes, gauges, & material available upon request

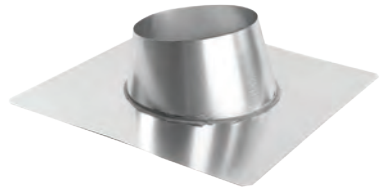













T-TOP VENT

Size
4" - 10"
<ul style="list-style-type: none"> • Available in Galvanized, Galv. Mesh, Dead Soft Alum., and Shake Base • Other sizes, gauges, & material available upon request



RECTANGULAR DUCT

		
L-SECTION DUCT	RECTANGULAR PLENUM W/ CAP	PLENUM END CAP
		
DUCT W/ CONNECTOR	90° ELBOW	NON 90° ELBOW
		
TRANSITION	TRANSITIONAL OFFSET	STRAIGHT OFFSET
		
PANT FITTING	CROSS FITTING	RECTANGULAR TEE
		
GOOSE NECK	PARKER FITTING	ROOF CURB

RECTANGULAR DUCT CONNECTORS

FLANGE

- Available in 10'L and 20'L in Galvanized Steel
- TDC Duct System is available at lower cost
- Recommended for 16 - 26 Ga. ductwork
- Tested per SMACNA Class Standards
- J Flange is 20Ga Galvanized Steel
- Available in specialty metals upon request



CORNERS

- Available for J, H or TDC
- Corners are available in standard or universal
- Available in specialty metals upon request



CLEATS


- Available for J, H or TDC
- Available in specialty metals upon request



Connector Accessories		
Gaskets	Bolts/Nuts	Vane/Rail
 <ul style="list-style-type: none"> • Butyl 3/16" x 5/8" or • 5/16" x 3/4" neoprene 	 <ul style="list-style-type: none"> • Bolt 3/8" x 1-1/4"L • Nut 3/8" 	 <ul style="list-style-type: none"> • 2" or 4" Vanes or Rails

RETURN AIR CAN

Size			
20-1/4" x	12-1/4"	25-1/4" x	12-1/4"
	14-1/4"		14-1/4"
	16-1/4"		16-1/4"
	18-1/4"		18-1/4"
24-1/4" x	12-1/4"	30-1/4" x	12-1/4"
	14-1/4"		14-1/4"
	16-1/4"		16-1/4"
	18-1/4"		18-1/4"
<ul style="list-style-type: none"> • Specify collar size • Other sizes, gauges, & material available upon request 			

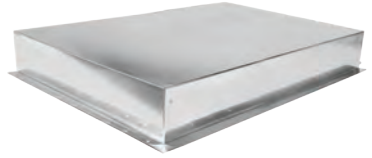

DRAIN PAN

Size
Custom Fabrication
<ul style="list-style-type: none"> • Available without drain plug • Other sizes, gauges, & material available upon request



LINE SET COVER

Size
Custom Fabrication
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request



"S" LOCK & DRIVES

Size	
1"	26 Ga.
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request 	




STANDING "S"

Size
10'L
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request



ANGLE

Angle
<ul style="list-style-type: none"> • 16 Ga. Galvanized Steel - 1 1/2" x 1 1/2" • Other sizes, gauges, & material available upon request

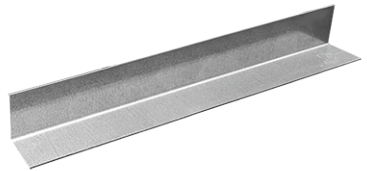

VANES & RAILS

Size
2" & 4" Wide
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request • Single Wall Vanes available upon request



RISER PIPE

Size
8" x 3 ¹ / ₄ " W
10" x 3 ¹ / ₄ " W
12" x 3 ¹ / ₄ " W
14" x 3 ¹ / ₄ " W
<ul style="list-style-type: none"> • Available in 3', 7-1/2' & 10' Lengths • Available in KD or assembled • Cap available for all sizes • Other sizes, gauges, & material available upon request



RISER ELBOWS

Size
8" - 14"
<ul style="list-style-type: none"> • Standard: 30 gauge, 3-1/4" W • Available in 90 and 45 Flat or Standard • Other sizes, gauges, & material available upon request



REGISTER BOXES

Size
8" - 14"
<ul style="list-style-type: none"> • Standard: 30 gauge, 13" high, 3-1/4" W • Register Boxes with Ears available upon request • Other sizes, gauges, & material available upon request



ACCESS DOORS

DUCT & DRYWALL

Door Size	
6" x 6"	16" x 16"
8" x 8"	18" x 18"
10" x 10"	20" x 20"
12" x 12"	22" x 22"
14" x 14"	24" x 24"
<ul style="list-style-type: none"> • Duct doors are dovetail, hinged, & cammed • Drywall doors are hinged & screw lock 	



ROUND DOOR



Door Size	Pipe Size
8 x 4	5 - 6"
	7 - 9"
	10"
	12 - 14"
12 x 8	16"
	18"
	20"
	22"
<ul style="list-style-type: none"> • Other sizes, gauges, & material available upon request 	

HIGH TEMP ACCESS DOOR



Door Size
10" x 6"
12" x 8"
18" x 14"
24" x 18"
<ul style="list-style-type: none"> • Standard: Flat 1000°, 2000° door available upon request • Round fire door & other temperature rates available upon request • Other sizes, gauges, & material available upon request

HANGERS / SUPPORTS

HANGER STRAP

Size	Ga.
1-1/2" x 10'L	14
1-1/2" x 10'L	16
1" x 10'L	16
1" x 10'L	20
1-1/2" x 10'L	20
1-1/2" x 80'L No holes	24
1-1/2" x 80'L w/ holes	24
1-1/2" x 80'L No holes	26
1-1/2" x 10'L w/ holes	26



* Other sizes, gauges, & material available upon request

THREADED ROD



Description	Size
Threaded Rod	3/8" x 10'L
	1/2" x 10'L

* Zinc plated


UNISTRUT



Description	Size
Unistrut	1 5/8", 2.5" x 9/16" Slots

DURA-BLOK

Description	Size
Dura-Blok	DB10
	1 inch 500 lb



BELLY BANDS



Description	Size
Single Bands	4" - 50"
Double Bands	4" - 50"

* Other sizes, gauges, & material available upon request

ISO SPRING HANGERS

Spring Load	Mount Load
55 lbs	79 lbs
79 lbs	143 lbs
106 lbs	
143 lbs	



* All types of spring isolators and hangers
 * Most available in stock

ISO PADS



Size
2" x 2" Squares

* Super duty rubber pads 3/4"

DAMPERS HARDWARE AND SCREWS



DIAL



SQUARE BEARING



SPRING LOC



JIFFY DAMPER



WEDGE LOC



ROUND BEARING



QUADRANT

Hardware	
Damper	Spring Loc
Dial	Wedge Loc
Square Bearing	Quadrant
Round Bearing	Handle



Open/Closed Bearing



Spring Bearing



Stamped Bearing



Wing Nut



Jiffy Handle



Washer

Screws/Bolts/Nuts & Rivets

- Screws for sheet metal and wood are available in different in sizes
- Screws are available in Tek or Zip types
- Bolts, nuts, and washers are also available in various sizes
- Rivets are available in Aluminum & Stainless Steel
- Sheet Metal tools are in stock




INSULATION & FIRE WRAP

Product	Size
Duct Liner Insulation	1/2", 1", 1-1/2" & 2" <ul style="list-style-type: none"> • Various sizes available in stock • Available in different densities • Available in 50'L & 100'L
FSK Insulation	1-1/2", 2" & 3" <ul style="list-style-type: none"> • The specialty wrap available upon request
Fire Wrap Insulation	1-1/2" <ul style="list-style-type: none"> • Available in 24" & 48" width
Foil Insulation	5/16" <ul style="list-style-type: none"> • 36" width 50" Length R-6 Value



DUCT COVER FILM

- Standard: 2.5mil, blue
- Comes in 24" & 36", 200 ft. long
- Protects and seals duct from contaminants
- Meets SMACNA Standards
- UV resistant, tear, & puncture strength
- High tack and no residue upon removal with anti-bacterial adhesive agents
- Other sizes available upon request

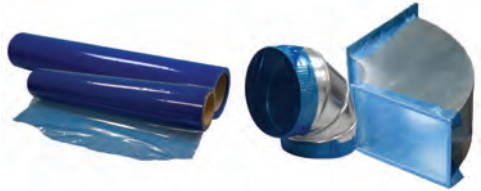

FLEX CONNECTOR


Size
3" x 3" x 3" (100' roll)
4" x 4" x 4" (100' roll)
<ul style="list-style-type: none"> • Standard: Vinyl • Neoprene & other material available upon request



ROD ANCHORS

WOOD

Dual head drilled to accept 3/8-16 threaded rod components




2-1/4" length

FEATURES & BENEFITS

- End-drilled and tapped for attaching 3/8-16 threaded components to wood
- Solid, one piece cold formed part; head cannot spin off or unscrew from body
- Type 17 point cuts threads into wood and wax coating reduces installation torque

CONCRETE

Dual head drilled to accept 3/8-16 threaded rod components

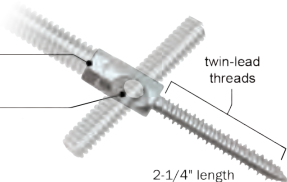


2-1/4" length

FEATURES & BENEFITS

- End-drilled and tapped for attaching 3/8-16 threaded components to concrete
- Solid, one piece cold formed part; head cannot spin off or unscrew from body
- Gimlet (tapered threads) point allows for easy starting in pre-drilled hole

CONCRETE

head drilled to accept 3/8-16 threaded rod components




1 5/8" length

FEATURES & BENEFITS

- Installs with standard 1/4-inch ANSI drill bit
- Faster installation resulting in labor savings
- Patented thread design offers low installation torque
- Tough threads for tapping high strength concrete

STEEL

Dual head end-drilled to accept 3/8-16 threaded rod components

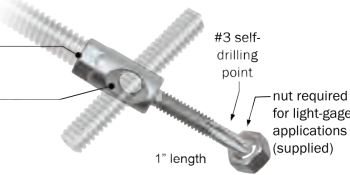


1" length

FEATURES & BENEFITS

- End-drilled and tapped for attaching 3/8-16 threaded components to steel
- Solid, one piece cold formed part; head cannot spin off or unscrew from body
- #3 self-drilling point for steel thicknesses of .060 - .250"
- Includes backing nuts which greatly improves pullout values in thin material and are required to meet certain UL/FM requirements

ADAPTER

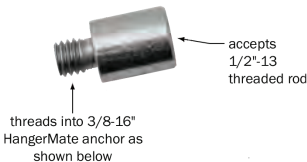

threads into 3/8-16" HangerMate anchor as shown below

accepts 1/2"-13 threaded rod

FEATURES & BENEFITS

- One-piece anchor threads into installed 3/8-16 HangerMate anchors
- Head end-drilled and tapped to accept 1/2-13 threaded rod components
- No special tools required; simply install any 3/8" HangerMate anchor as required, then thread adapter into it by hand
- Use of adapter does not increase performance value of 3/8" HangerMate anchor - check corresponding 3/8" anchor spec sheet for load-carrying capacity and add appropriate safety factor

HANGER HARDWARE

Description	Size
Beam Clamp "C" Type w/ Locknut	3/8"
• Other sizes available upon request	



Description	Size
Side Beam Bracket Angle	2" x 2" w/ 3/8" holes
• Other sizes available upon request	



Description	Size
Beam Clamp Strap	3/8" x 12"
Beam Clamp Adj. Strap	3/8" x 12"
• Other sizes available upon request	



Description	Size
Spring Nut	3/8"
	1/2"




Description	Size
T-Bar Wire	8'L, 12Ga
T-Bar Wire	10'L, 12Ga
T-Bar Wire	12'L, 12Ga
T-Bar Wire	14'L, 12Ga



DUCT & FOIL TAPE

Type	Size	Specification
AL Foil	3" x 50yd	UL Non Printed
AL Foil	2.5" x 60yd	UL Printed
AL Foil Grip	4" x 50ft	UL Non Printed
AL Foil Grip	3" x 100ft	UL Non Printed
Line Set	2" x 60yd	UL Printed
Cloth	2" x 60yd	UL Non Printed
Cloth	2" x 60yd	UL Printed
Flag	13/16"x150ft	Non Printed
Flex	2" x 120yd	UL Printed
Flex	2" x 120yd	UL Printed
FSK	3" x 150ft	Non UL Printed

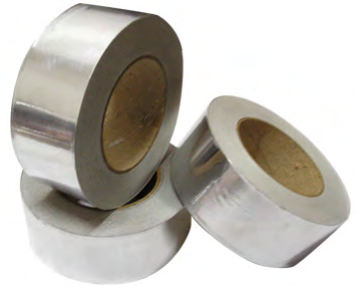

DUCT SEALER, ADHESIVES & FIRE STOP

DP1010/1020/1030
CCWI - 181
Silicone
Fire Stop
Spray Adhesive
2" Chip Brush
Caulking Gun
<ul style="list-style-type: none"> • DP1010 and DP1020 available in Cartridge or Gallon • Caulking available in clear or white • Duct liner adhesive available in 5 Gal., 55 Gal. & Spray cans • Fire Stop 10.5oz. Cartridge



COPPER FITTINGS

Fittings
Adapters
Bushings
Couplings
Elbows
Street Elbows
• Call for sizes and availability



COPPER LINE SET

Size
1-1/8" x 3/8" x 3/4" ins.
3/4" x 3/8" x 3/4" ins.
7/8" x 3/8" x 3/4" ins.
• Other sizes, gauges, & material available



PVC PIPE & FITTINGS

Fittings	
Pipe	Elbows
Adapters	Traps
Couplings	Tees
Caps	Cement/Primer
Drain Slip Fitting	



SERVICE GASES

Gases
Oxygen
Acetylene



BRAZING ALLOY

- Contains 6% silver solder.
- Designed to flow and melt just like 15% silver alloy.



BLACK IRON PIPE & FITTINGS

Fittings	Nipples
Pipe	Tees
Coupling	Caps
Elbows	...& more

• Available in 1/2" and 3/4"



GAS LINE/CONNECTORS

Size
1/2" MIP x 1/2" FIP Ball
3/8" MIP x 1/2" FIP Ball


• Grommets available upon request



THERMOSTAT WIRE

Ga.	Length
18-5	250'
18-6	250'
18-8	250'
18-10	250'
20-5	250'
20-6	250'
20-8	250'


• Plenum rated wire available upon request

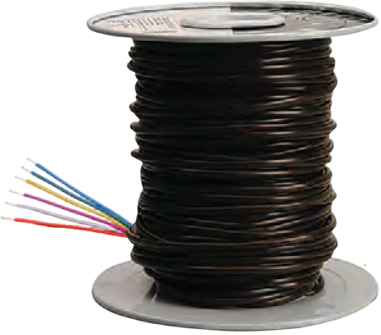

WHIPS

Size	Length
1/2"	6'
3/4"	6'

• Whips & fittings are sold in bulk



PIGTAILS/POWER CORD

Size
6'L

• Grommets available upon request



DISCONNECT & FUSES

Size
30 AMP
60 AMP



COIL CLEANER/FREON/ZIP TIES

COIL CLEANER

Size
Gallon
Aerosol Can



FREON

R22
R410A



ZIP TIES

Size
36" Length
48" Length
* Available single or in packs of 50



STAMPED GRILLES & REGISTERS

Size		
2-Way	3-Way	4-Way
8" x 4"	8" x 4"	8" x 8"
10" x 6"	10" x 6"	10" x 10"
12" x 6"	12" x 6"	12" x 12"
12" x 8"	12" x 8"	14" x 14"
14" x 6"	14" x 6"	
14" x 8"	14" x 8"	
	14" x 10"	
• Other sizes available upon request		



STAMPED RETURN & FILTER GRILLES



Size	
Return Grille	Return Filter Grille
10" x 6"	24" x 12"
10" x 10"	24" x 14"
14" x 6"	24" x 16"
14" x 8"	24" x 18"
14" x 14"	24" x 20"
20" x 20"	30" x 14"
24" x 16"	30" x 20"
	36" x 20"
• Other sizes available upon request	



BAR TYPE GRILLES & REGISTERS

Size	
1-Way	3-Way
8" x 4"	10" x 6"
10" x 6"	10" x 10"
10" x 10"	12" x 6"
12" x 6"	12" x 12"
12" x 12"	14" x 6"
14" x 6"	14" x 8"
14" x 8"	14" x 10"
14" x 14"	

• Other sizes available upon request



BAR TYPE RETURN & FILTER GRILLES

Size	
Return Grille	Return Filter Grille
8" x 8"	20" x 20"
10" x 10"	24" x 12"
12" x 12"	24" x 14"
14" x 14"	30" x 14"
	30" x 16"
	30" x 20"

• Other sizes available upon request



T-BAR PERFORATED SUPPLY DIFFUSER

Size
6"
8"
10"
12"
14"



CURVE BLADES


T-BAR CONE SUPPLY DIFFUSER

Size	
6"	14"
8"	16"
10"	18"
12"	



T-BAR PERFORATED RETURN AIR DIFFUSER

Size	
6"	14"
8"	16"
10"	18"
12"	



LOUVERS

LOUVERS INCLUDE

- Extruded Aluminum
- Formed Steel
- Stationary
- Adjustable
- Combination
- Operable
- Acoustical

• Call for sizes and availability



ADJUSTABLE LOUVER

COMBINATION LOUVER



FIRE/SMOKE DAMPERS

Fire/Smoke Dampers are used in HVAC systems where both a Fire Damper and Smoke Damper are needed in the same location. The dampers have passed both UL555 and UL555S test requirements for dynamic fire dampers and smoke dampers.

- | |
|--|
| • Class I Ultra-Low Leakage |
| • Class II Low Leakage |
| • Fire/Smoke Damper for tunnel & corridor applications |
| • Class III Leakage |



BACKDRAFT DAMPERS

From light to heavy duty applications, We can provide the perfect backdraft damper for your HVAC needs.

- | |
|--|
| • Light/Medium duty aluminum dampers |
| • Counter Balanced Dampers |
| • Standard Galvanized Steel Dampers |
| • Round Backdraft Dampers also available |



CONTROL DAMPERS

Commercial control dampers help make buildings more comfortable and energy efficient. They provide high performance and are an excellent value.

- | |
|--|
| • Standard steel control damper |
| • Low leakage 16ga galvanized blades |
| • Mill galvanized (optional stainless steel) |
| • Accessories/Options: Neoprene blade seals |



SMOKE DETECTORS

- Low-Flow Technology: Both Ionization and Photoelectric models available
- Interconnect up to 30 units for common functions
- Flashing LED on detector head indicates normal operation



GAS DETECTION SYSTEM

40 Input Digital Controller

Supports 40 transmitter/sensors

Controls up to 99 relays

Digital RS-485 or Analog

Relays, LCD display,
LED alarm status



Sensor Digital Controller

Supports 4 digital
transmitter/sensors

Controls up to 4 relays

RS-485 and Analog outputs



Gas Detection Sensor

Electrochemical Toxic sensor

Oxygen, Nitrogen Dioxide,
Carbon Monoxide, Nitric
Oxide, and Ammonia

Range fully adjustable

4-20mA or 2-10VDC output fully
assignable within the range

LCD display

Two optional SPDT relays






Submittal Sheet

Rectangular Duct & Fittings

- Pacific Duct Inc. Rectangular Ducts and Fittings are fabricated from galvanized steel per ASTM-A90, A568, A653, A924 and are in accordance with the latest edition of SMACNA Duct construction standards.
- Reference SMACNA tables 1" - 10" W.G. for construction standards and reinforcement schedule.
- Options of stainless steel, aluminum, paint-lock, and other materials are available upon request.
- All ducts are beaded on 12" centers, with first bead 6" from end for extra strength. Cross breaking is available upon request.
- Standard duct lengths are 4', 5', or 6'. Other duct lengths are available in any length requested.
- All slips and drives, nuts, bolts, gaskets, reinforcements and misc. hardware are included with duct work.
- All ducts and fittings are available bare, lined, or wrapped.
- All rectangular ducts and fittings are shipped, assembled, unless otherwise specified.

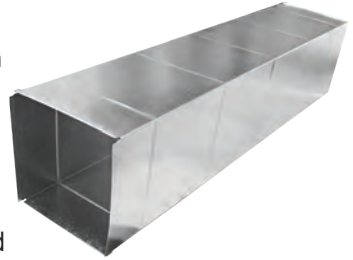

*Submittals and Specs are subject to change without notice.

<p>Alternative Joint Connectors</p> <p><input type="checkbox"/> Slip & Drive <input type="checkbox"/> Ductmate</p> <p><input type="checkbox"/> TDC <input type="checkbox"/> Other _____</p>	<p>Reinforcement Options</p> <p><input type="checkbox"/> External Angle Iron</p> <p><input type="checkbox"/> Internal Tie Rods</p>
<p>Duct Seam Construction</p> <p><input type="checkbox"/> Pittsburg</p> <p><input type="checkbox"/> Snap-Lock</p>	<p>Fittings Seam Construction</p> <p><input type="checkbox"/> Pittsburg</p> <p><input type="checkbox"/> Snap-Lock</p>

Job Name: _____ Location: _____

Mechanical Contractor: _____ Job No: _____

Manufacturer: _____ Date: _____



Submittal Sheet

Round Duct & Fittings

Round Duct Standard Gauge Selection
 Unreinforced Positive Pressure
 Galvanized Steel

SMACNA			UMC		
Dia. (Size)	Spiral Seam	Long Seam	Dia. (Size)	Spiral Seam	Long Seam
3 - 8"	28	28	3 - 14"	26	26
9 - 14"	28	28	16 - 22"	24	24
16 - 26"	26	26	24 - 36"	22	22
28 - 36"	24	24	38 - 50"	20	20
38 - 50"	22	22	52 - 60"	18	18
52 - 60"	20	20	62 - 84"	16	16
62 - 84"	18	18			



Applies to low pressure systems 2" positive static water. Round gauge selection for galvanized Steel as displayed in SMACNA & UMC HVAC Duct Construction Standard Manual

Job Name: _____ Location: _____

Mechanical Contractor: _____ Job No: _____

Manufacturer: _____ Date: _____

PACIFIC DUCT INC.

MANUFACTURING & SUPPLY OF HVAC PRODUCTS

5499 W Brooks Street Montclair, CA 91763

Tel: (909) 635-1335

Fax: (909) 635-1339

Email: sales@pacificduct.com

Web: www.pacificduct.com



PDI
PACIFIC DUCT INC.

11/2018